


Deli Square Glass

NOTE:- Serving height for children up to 12 years of age.  
This model is available with a work top height of 800mm and a Trayslide height of 773mm.  
Please add "B" to the end of the product code.

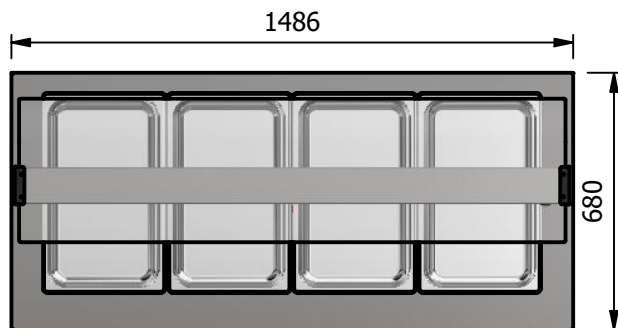

### Specification

#### Wet Heat

Water level is an economic, 20mm deep with a water level mark on the well complete with drain valve and swing-out run-off tube for easy emptying. The well has a raised lip designed to hold Gastronorm pans and heats via solid state elements fitted under the well, additional excess residual hot air from the hot cupboard is also used to maintain temperature which gives energy saving efficiency.

#### Dry Heat

Fan Assisted Hotcupboard

#### Dimensions

Width - 1486mm  
Depth - 680mm  
Height - 900mm  
Weight - 101kg



Sahara Fan Model SF309

#### Capacity of Bainmarie

Four GN1/1 pans up to 150mm deep  
[Note:-pans are not supplied, available at extra cost]

#### Capacity of Hot Cupboard [usable inside space]

Width - 1351mm  
Depth - 555mm  
Usable Height Bottom shelf - 204mm  
Usable Height Top Shelf - 245mm

50 covers & meals [10" plated meals stacked using plate covers]  
or  
190 off 10" plates stacked for heating  
or  
8 off 1/1GN pans side by side 150mm deep 4 on top 4 on bottom

#### Power Rating


2.9kw with no gantry, 3.56Kw with heated gantry.  
complete with a 2m long cord set & 15amp or 20amp plug  
Removable Fan heating System Sahara Fan Model SF309

#### Materials

1.2mm 304 Grade St/ Steel Top & Supports  
0.7mm 430 Grade St/ Steel Internal Structure  
GN 1/1 Grid Shelves with 30mm x 30mm tube supports


#### Installation

All swivel castors, two braked

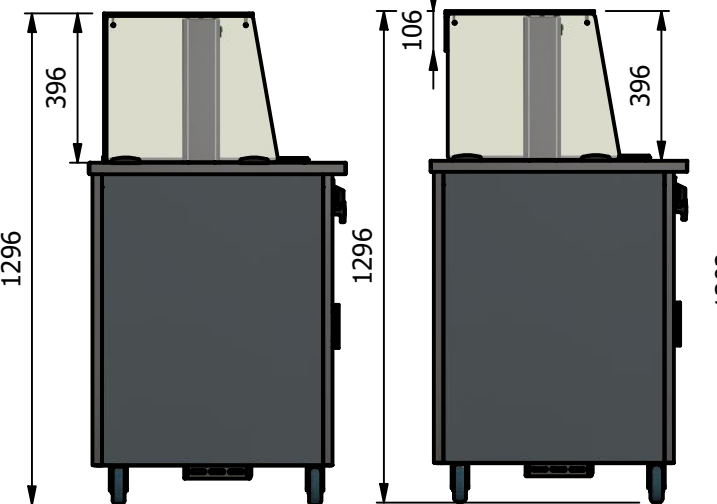

Square Glass Closed Front

Square Glass Open Front

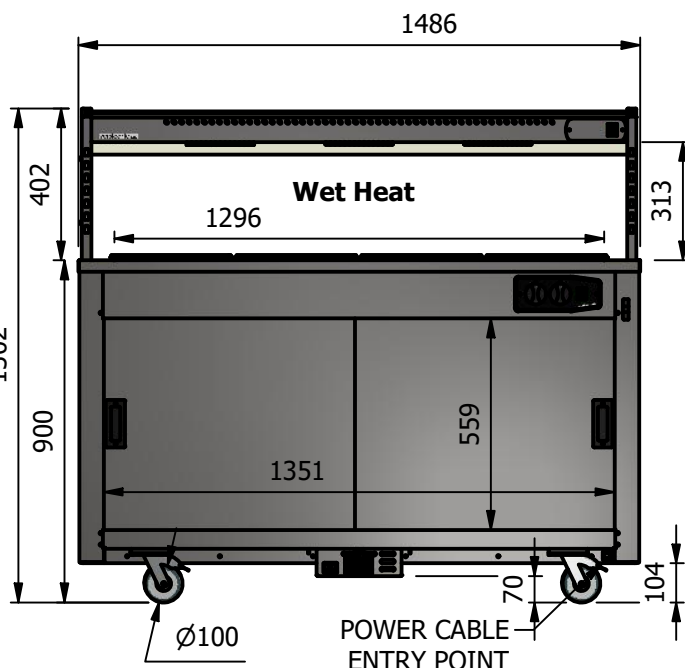

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR  $\pm 0.5\text{mm}$ , ANGULAR  $\pm 0.5\text{mm}$  (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A		<div><div><div></div><div>No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.</div></div><div><div></div><div>Versigen</div></div></div>				
Description	*** VC4BMW ***			Square Glass Options							
Material/Finish		Thickness		Desp/Date							
Legacy P/N		Weight	101kg	Quote No.			Dwg No.	VCP-081982	Issue		
Client				SO Number	STANDARD		Drawn By	ABB		-	
Client Project				Approved By			Date	28/10/2019			
VERSIGEN AUSTRALIA PTY LTD, 182 HARTLEY ROAD, SMEATON GRANGE, NSW 2567, T: +61 (0)131 653 330, E: sales@versigen.com.au, Web: www.versigen.com.au							Scale	1 : 20	Sheet	1 / 2	A4